

HELI
LIFTING THE FUTURE

h2000
SERIES



H2000 SERIES 3.5-5t INTERNAL-COMBUSTION TOW TRACTOR



ANHUI HELI CO., LTD.



LIFTING THE FUTURE

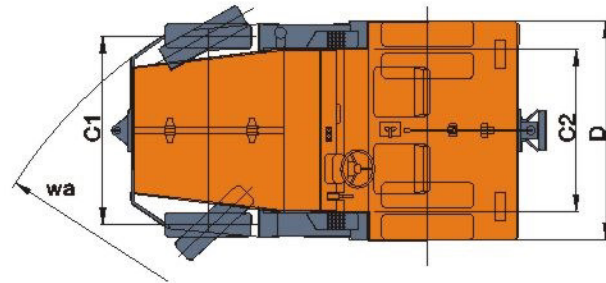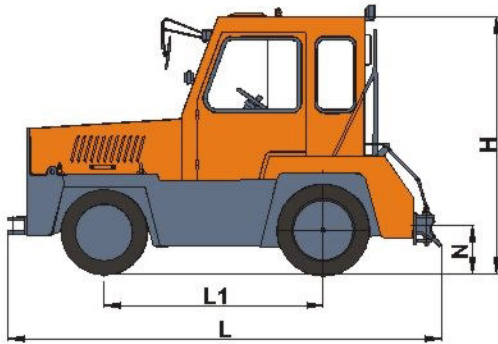

H2000 SERIES 3.5-5t INTERNAL-COMBUSTION TOWTRACTOR

Model			QYCD35-P	QYCD45P	QYCD50-P	QYCD35-CU	QYCD45-CU	QYCD50-CU	QYCD35-WXH	QYCD45-WXH	QYCD50-WXH
Max.drawbar.pull		F(kN)	35	45	50	35	45	50	35	45	50
Max.travel speed(without load)		V(km/h)	23.7/23.7	23.7/23.7	23.7/23.7	23/23	23/23	23/23	24/24	24/24	24/24
Gradeability		%	30								
Min.turning radius(outside)		Wa (mm)	4100								
Service brake distance		S(mm)	≤3(without load, 20km/h)								
Total weight		G(kg)	5810	6810	7600	5750	6750	7540	5810	6810	7600
Engine	Model		PERKINS 1104D-44TA			QSB4.5-C110			CA4DF3-13GG3U-HL10		
	BoreXstroke	mm	4-105X127			4-110X120			4-110X25		
	Rated output	kW/rpm	83/2200			82X2200			96/2200		
	Max.torque	N.m/rpm	418/1400			489X1500			500/1700		
Fuel tank capacity		V(L)	100								
External dimensions	Overall length	L(mm)	3775(without front coupler),3950(with front coupler)								
	Overall width	D(mm)	1995								
	Overall height	H(mm)	2350								
Wheel base		L1 (mm)	2000								
Treed	Front	C1(mm)	1720								
	Rear	C2(mm)	1470								
Min.ground clearance		E(mm)	190								
Center height of coupler		N(mm)	450								
Battery(Voltage/Capacity)		V/Ah	2-6-QW-80 12V×2 80Ah								
Transmission	Type		Stepless change speed								
	Gear rated		Forward&reverse II gear								
Brake apparatus	Service brake		Hydraulic brake (act on the front and rear tire)								
	Parking brake		Mechanical brake(act on center axle)								
Tire size	Front		2-7.50-15-12PR								
	Rear		4-8.25-15-14PR								

ANHUI HELI CO., LTD.

Add: No.163,Woyun Road,Economic Develop Zone,Hefei City,Anhui,China

Tel: 0551-63689667 63689674 63689676

Fax: 0551-63689667

http://www.helichina.com

HELI Product specification could be changed.